


HAAKER

EQUIPMENT COMPANY

2070 North White Avenue, La Verne, California 91750
(909) 598-2706 ~ FAX (909) 598-1427 ~ haaker.com

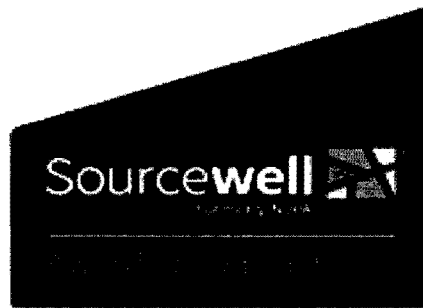

PROPOSAL

April 8, 2019

TO: CITY OF RIVERSIDE
5950 Acorn St.
Riverside CA 92504

ATTN: Mr. Jeff Calvin
951-351-6065
Email: JCalvin@riversideca.gov

In accordance with your request, we are pleased to submit the following proposal for your consideration and approval based on the Sourcewell Cooperative Purchasing Agreement – Contract #122017-FSC.

THREE (3) NEW VACTOR CNG 2112 PLUS SEWER CLEANERS

12-Cubic Yard Capacity with 18" Positive Displacement Blower, 1500 Gallons of Water, Mounted on A 2020 Kenworth T880 6x4 Chassis, Air Ride Seats, Heated Remote Mirrors, with 2010 Emissions, Equipped with all Standard and Optional Equipment listed:

Standard Equipment:

- 48" x 22" x 24" Curb Side Aluminum Toolbox
- Aluminum Fenders
- Mud Flaps
- Electric/Hydraulic Four Way Boom
- Color Coded Sealed Electrical System
- Remote Pendant Control w/35' Cord
- Vansco-Electronic Package
- Double Acting Dump Hoist Cylinder
- Handgun Assy. w/1/2" x 35' Hose w/Quick Disconnects
- 3" Y-Strainer at Water Pump Inlet
- Ex-Ten Steel Cylindrical Debris Tank
- Flexible Hose Guide
- 30 Deg. Sand Nozzle w/Carbide Inserts
- 30 Deg. Sanitary Nozzle w/Carbide Inserts
- 15 Deg. Penetrator Nozzle w/Carbide Inserts
- Nozzle Storage Rack
- Vacuum Tube Storage: Curbside (2) Pipe, Rear Door (2) Pipe
- 1" Nozzle
- 1" X 10' Leader Hose
- Flat Rear Door w/Hydraulic Locks and Door Power-up/Down, Open/Close Feature
- Dual 10" Stainless Steel Float Shut Off System/Rear Mounted
- Debris Body Vacuum Relief System
 - Debris Deflector Plate
 - 48" Dump Height
 - Water Sight Gauge PS
 - Liquid Float Level Indicator
 - Boom Transport Post Storage
 - 3" Y-Strainer @ Water Pump w/3" Drain Valve
 - Performance Package: (Hyd Variable Flow, Dual PTO's, Dual Hyd. Pumps)
 - 1" Water Relief Valve for Vactor Water Pump
 - Stainless Steel Microstrainer

- Blower Air Shift Controls
- Hydraulic Cooling Package
- Midship Handgun Coupling
- Side Mounted Water Pump
- Hose Wind Guide (Dual Roller)
- Hose Footage Counter - Mechanical
- Hose Reel Manual Hyd. Extend/Retract
- Hose Reel Chain Cover (Full)
- Tachometer/Chassis Engine W/Hourmeter
- Circuit Breakers
- LED Lights. Clearance, Back-Up, Stop, Tail & Turn
- Tow Hooks, Front and Rear
- Electronic Back-Up Alarm
- Hydraulic Tank Shutoff Valves
- 8" Vacuum Pipe Package
- Emergency Flare Kit
- Fire Extinguisher 5#
- Water Pump Hour Meter
- PTO Hour Meter
- Vactor 2100 Plus Body Decal – Blue
- Vactor Manual, Partial Manual and USB Version

Optional Equipment:

- Roots 824-18" Hg. Blower
- 180 Degree Rotation, 10 Ft. Telescoping Boom
- 80 GPM Variable Flow Water System
- 2500 PSI Water Pressure
- 1" x 800' Piranha Sewer Hose, 2500 PSI
- Hydraulic Extending/Rotating 15" Hose Reel (1" x 1000') Capacity
- Module Paint, Dupont Imron Elite - Sanded Primer Base
- Debris Body Flush Out System
- Debris Body Load Limit Alarm functionally tied to Vacuum Relief
- 6" Butterfly Valve, Rear Door, 3:00 Position
- Centrifugal Separators
- Folding Pipe Rack, Curb Side
- Rear Door Splash Shield
- Lube Manifold
- Plastic Lube Chart
- 6" Gravity Fill Port on Water Tank
- Hot Shift Blower Drive
- Rodder System Accumulator- Jack Hammer on/off control w/ manual valve
- Automatic Hose Level Wind Guide, Indexing
- Hose Reel Manual Rewind
- Handgun Hose Reel w/Spring Retract
- Rodder Pump Drain Valves
- Worklights (2), LED, 10 x 15 RDB Boom
- Worklights (2), LED, Rear Door
- Worklight, LED, Operators Station
- Worklight, LED, Hose Reel Manhole
- Worklight, LED, Curb Side
- Worklight, LED, Street Side
- Hose Reel Wrapped for Delivery
- Toolbox, Front Bumper Mounted, 16 x 12 x 18 w/(2) LED Side Markers
- Toolbox, Behind Cab
- Toolbox, Driver Side Chassis Frame, 24w x 24h x 24d
- Toolbox, Driver Side Subframe, 18w x 24h x 24d
- (4) Long Handle Tool Storage Locations Behind Cab
- Safety Cone Storage Rack - Post Style
- Additional Safety Cone Storage Rack - Post Style
- Digital Water Level Indicator
- Door Stripe Material, Reflective Tape
- 3 Year Extended Warranty
- Whelen LED Light Package – Includes LED Light Bar, Strobes and 36x72 Highway Safety Arrowboard

Sourcewell Unit Price	\$ 498,349.00 Each
Sourcewell Discount:	(\$ 9,298.00)
Subtotal:	\$ 489,051.00
Sales Tax (8.75%)	\$ 42,791.97

TOTAL PRICE F.O.B. RIVERSIDE, CA.: **\$ 531,842.97 Each**

TOTAL FOR 3 UNITS (\$489,051.00 X 3) :	\$1,467,153.00
Sales Tax:	\$ 128,375.88
TOTAL (3) UNITS:	\$ 1,595,528.00

If the following are desired, add price listed plus tax:

- | | |
|--|--------------|
| 1. Pump Off, Plumbed to Front Bumper | \$ 13,951.25 |
| 2. Stainless Steel Water Tanks, in lieu of Aluminum | \$ 9,656.25 |
| 3. Laval Water Separator at Fill | \$ 1,692.50 |
| 4. 10'x15' Broom in lieu of 10' Boom (upcharge) | \$ 5,295.00 |
| 5. Hands free intercom plus radio (4), 5 User full duplex
Wireless connections, up to 5 channels, dual internal
Antenna/external remote antenna connections, 24 hour
Battery, base housed in case with carry bag and 5-user | |

6. Charging case with charger..... \$ 6,655.00
Jetscan HD Video Nozzle complete system with camera, 6"
And 8" jetter sleds, set 6/nozzle plugs, camera case,
Battery charger, (2) 16GB SD cards, (2) spare windows,
(2) spare window o-rings, spare window screws, torx
Wrench, spare cap o-ring, Rain-X and Loctite. \$ 15,100.00

THE PROPERTY HEREIN IS GUARANTEED BY MANUFACTURER'S WARRANTY ONLY AND SELLER MAKES NO WARRANTY EXPRESSED OR IMPLIED, OF MERCHANTABILITY OR OTHERWISE, OR OF FITNESS FOR ANY PARTICULAR PURPOSE, THAT EXTENDS BEYOND THE ABOVE DESCRIPTION OF THE EQUIPMENT.

NOTE: Price is good until 120 Days. Cost increases due to the addition of Government mandated safety or environmental devices incurred after the date of this proposal, will be charged to you at our cost. Proof of such costs, if any, will be documented.

TAXES: Any sales tax shown is subject to change. Sales tax will be calculated and charged based on current rates for the location of the sale at time of invoice. FEDERAL EXCISE TAXES, if applicable, will require payment unless a properly executed Exemption Certificate is submitted.


DELIVERY: Approx 180-300 Days **TERMS:** Net 30

We appreciate the opportunity to present this proposal and look forward to being of further and continued service.

HAAKER EQUIPMENT COMPANY **ACCEPTED BY:** _____

BY: David Kane **DATE:** _____
David Kane/Sales Representative

CERTIFIED AS TO FUNDS AVAILABILITY:

BY: 
Chief Financial Officer/City Treasurer

Approved as to Form:

By: 
Ruthann M. Salera
Deputy City Attorney